



Application Note AN-PAN-1051

Inline process monitoring of the moisture content in propylene oxide

Propylene oxide (C_3H_6O , PO) is a major industrial product with a global production of more than 11 million tons [1]. PO is mostly produced to make polyether polyols, propylene glycol, propylene glycol ether solvents, and other products.

There are several production processes available, however the majority of PO is still co-produced along with styrene monomer (approximately one-third of PO production worldwide). Other PO production routes include the chlorohydrin process, epoxidation of propylene with

hydrogen peroxide, epoxidation of propylene with organic peroxides, and even epoxidation using molten salts.

This Process Application Note presents a method to closely monitor in «real time» low levels of moisture in PO safely, reliably, and optimally. Due to the hazardous and hygroscopic nature of PO, a single explosion-proof inline process analyzer is the preferred solution to reduce chemical treatment, improve product quality, and increase profits.


INTRODUCTION

PO is a highly hazardous, flammable, and hygroscopic substance, and therefore needs to be handled with extreme caution. Tight control over moisture and other impurities in the final product (as well as along the manufacturing process at critical points) is necessary to overcome unwanted side reactions or poor yields.

Manual laboratory methods can be quite cumbersome and can introduce bias depending on the analyst. Additionally, the hygroscopic nature of PO necessitates inline or online analysis of water content for the most precise results. «Real-time» analysis is a requisite for high

throughput PO production because this gives short response times in case of process changes or increased water content in the final product. Safe analysis of low moisture content in PO is possible with reagent-free techniques such as near-infrared spectroscopy (NIRS). Suitable NIRS process analyzers are available for use in hazardous environments with robust stainless steel flow cells (**Figure 1a**). Metrohm NIRS process analyzers enable comparison of «real-time» spectral data from the process to the primary method (titration) to create a simple, yet indispensable model for the PO production process.

a)

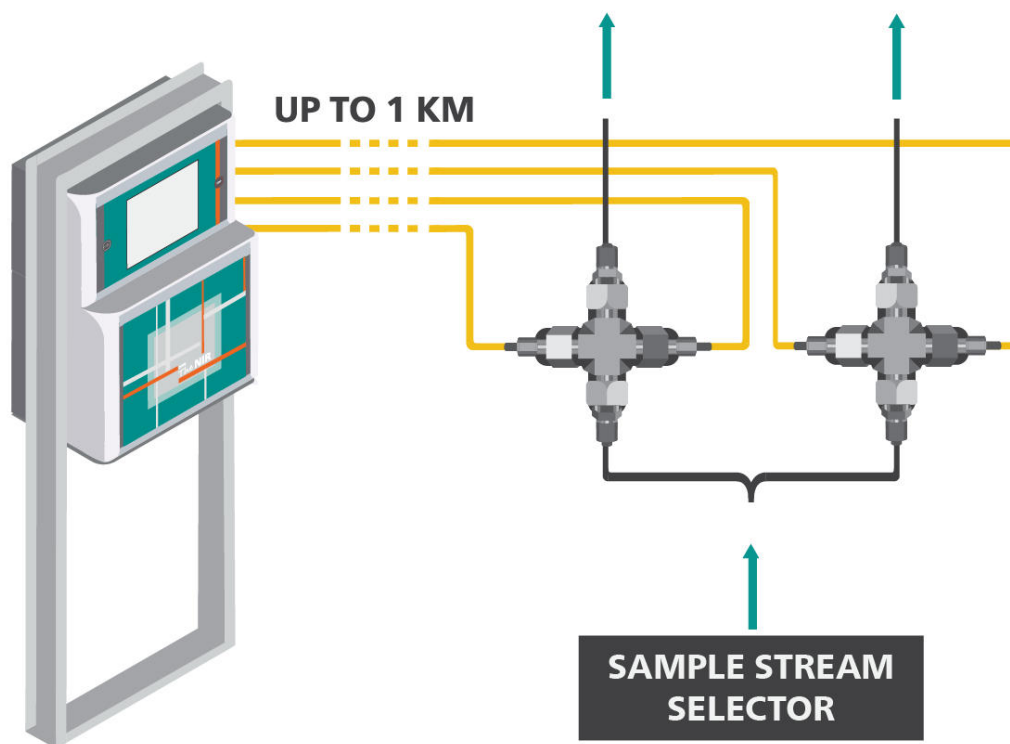

b)

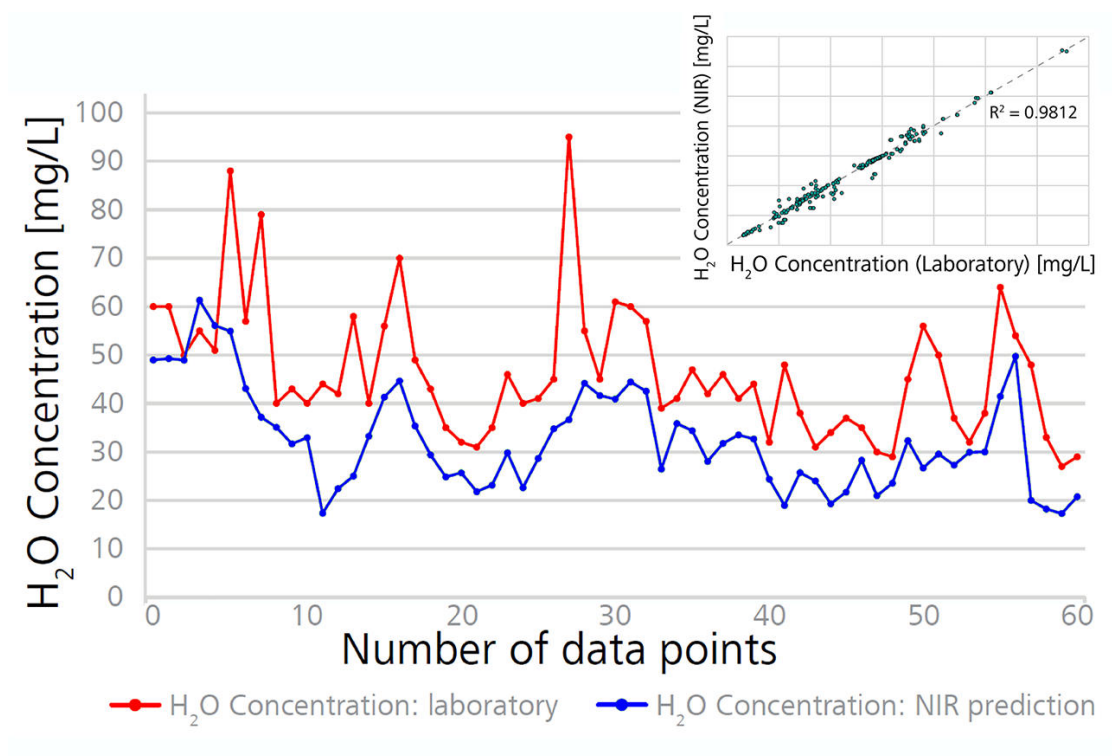


Figure 1. (a) NIRS system configuration for online analysis of water content in PO streams. (b) Validation of the NIR process data by laboratory Karl Fischer (KF) titration; inset shows enclosed NIR calibration model for predicting water concentration in propylene oxide process streams. All figures were adapted from GIT Labor-Fachzeitschrift article [2].

APPLICATION

Wavelength range used: 1850–1950 nm.
Stainless steel flow cells were used for online measurements. Explosion-proof process

analyzers are recommended for hazardous areas such as these.

Table 1. Typical water concentration range in PO according to ASTM guidelines

Component	Range (mg/L)
Water	20–30

A reference method (i.e., Karl Fischer titration) (Figure 1b) is mandatory to build the NIRS prediction models. Measurements performed in the laboratory showed higher water content values than those predicted via online NIRS. By the time the KF

titration was performed in the lab, the PO samples had absorbed atmospheric moisture and were no longer completely representative of the actual process conditions. Therefore, online KF titration was used to build more accurate prediction models.

Table 2. Dedicated NIRS sampling solutions offered by Metrohm Process Analytics.

	Specification	Measurement principle	Fiber type	Connecti on	Process measurement
Flow cell	Fixed pathlength 2 mm SS316	Transmission	Single	Swagelo ck	Online
	Variable pathlength 0.5–12 mm	Transmission	Single	Swagelo ck	Online
	PTFE Flow-through cell	Transmission	Single	Swagelo ck	Online

CONCLUSION

The utilization of a single, explosion-proof online process analyzer for moisture analysis in propylene oxide enables the reduction of chemical treatment, improves product quality, and increases profits. Gain more control over propylene oxide production with a Metrohm Process Analytics 2060 *The NIR Analyzer* system

configured for applications in hazardous areas. These analyzers can monitor up to five process points per NIR cabinet with the multiplexer option, facilitating increased sampling points and enabling the measurement of additional parameters like hydroxyl number.

RELATED PROCESS APPLICATION NOTES

[AN-PAN-1007](#) Online analysis of peroxide in the HP-PO process

[AN-PAN-1047](#) Inline monitoring of water content in naphtha fractions by NIRS

OTHER RELATED DOCUMENTS

[WP-023](#) Karl Fischer titration and near-infrared spectroscopy in perfect synergy

[8.000.5325](#) Water Content Analysis

BENEFITS FOR NIRS IN THE PO PROCESS

- Optimize product quality and increase profit with faster response time to process deviations
- Greater and faster return on investment (ROI)
- No manual sampling needed, thus less exposure of personnel to dangerous chemicals



REFERENCES

1. *Propylene Oxide Market Size, Growth, Share & Forecast, 2032.*
<https://www.chemanalyst.com/industry-report/propylene-oxide-po-market-755>
(accessed 2023-09-28).
2. Kleimeier. Nahinfrarotspektroskopie Produktionsprozesse Unter Der Lupe. *GIT Labor-Fachzeitschrift* **2018**, 36–38.

CONTACT

メトロームジャパン株式会社
143-0006 東京都大田区平和島6-1-1
null 東京流通センター アネックス9階

metrohm.jp@metrohm.jp

CONFIGURATION



2060 The NIR Analyzer

2060 *The NIR Analyzer* は、Metrohm Process Analytics 製の次世代プロセス分光分析計です。その独自で定評のある完全な設計により、10 秒ごとに正確な結果を出します。この装置は、光ファイバーまたは接触式フローを用いた、プロセスラインまたは反応容器における直接液体または固形物の非破壊分析を提供します。五 (5) つまでのフローおよび/またはフローセルを接続できるように設計されています。弊社独自開発の多機能な組込ソフトウェアを使用して、5 つのチャンネルをすべて互いに独立して設定することかてきます。

2060 フラットフォームの一部として、2060 *The NIR Analyzer* はモジュール式コンセプトを有し、他の三つのバージョンで使用可能です: 2060 *The NIR-R Analyzer*、2060 *The NIR-Ex Analyzer*、および 2060 *The NIR-REx Analyzer*です。